










CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES	
MODEL		LY1,-S,-N,-F,-O	
DIMENSIONS(mm)		27.5×21.5×35	
CONTACT FORM		1Z	
CONTACT CAPACITY		10A 250VAC	
COIL VOLTAGE	DC	6~220V	
	AC	6~380V	
COIL POWER		DC: ≤ 0.9W AC: ≤ 1.2VA	
PICK-UP		DC: ≤ 75% AC: ≤ 80%	
DROP-OUT		DC: ≥ 10% AC: ≥ 30%	
CONTACT RESISTANCE		≤ 50mΩ	
INSULATION RESISTANCE		≥ 100MΩ	
LIFE	ELECTRICAL	10 ⁵ times	
	MECHANICAL	10 ⁷ times	
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms	
	BETWEEN COIL & CONTACTS	1500v rms	
MOUNTING FORM		P.C.B&Socket	 
OPERATING TEMPERATURE		-40℃~+55℃	
WEIGHT		About 35g	
LIKE PRODUCTS		富士達公司 HH61P	
FITTED SOCKET		PTF08A PTF08A-E PT08	
REMARKS		With lamp:-N,FLANGE:-F, With button:-S,PCB:-O	



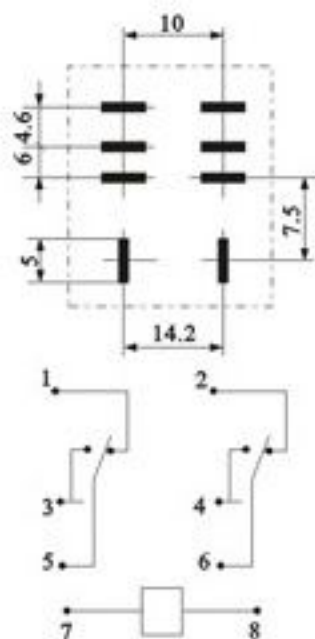

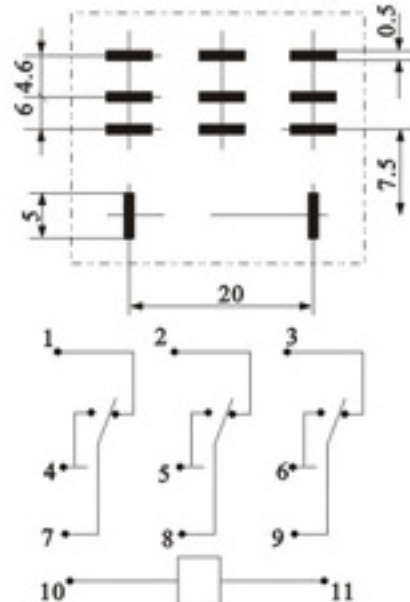
CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		LY2,-S,-N,-F,-O
DIMENSIONS(mm)		27.5×21.5×35
CONTACT FORM		2Z
CONTACT CAPACITY		10A 250VAC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC: ≤ 0.9W AC: ≤ 1.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC: ≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		P.C.B&Socket  
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 35g
LIKE PRODUCTS		富士達公司 HH62P
FITTED SOCKET		PTF08A PTF08A-E PT08
REMARKS		With lamp:-N,FLANGE:-F, With button:-S,PCB:-O



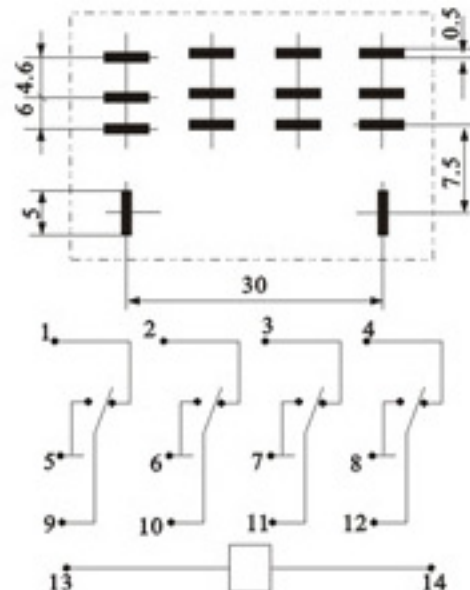


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		LY3,-S,-N,-F,-O
DIMENSIONS(mm)		27.5×31×35
CONTACT FORM		3Z
CONTACT CAPACITY		10A 250VAC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC: ≤ 0.9W AC: ≤ 1.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC: ≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		P.C.B&Socket  
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 53g
LIKE PRODUCTS		富士達公司 HH63P
FITTED SOCKET		PT11 PTF11A
REMARKS		With lamp:-N,FLANGE:-F, With button:-S,PCB:-O



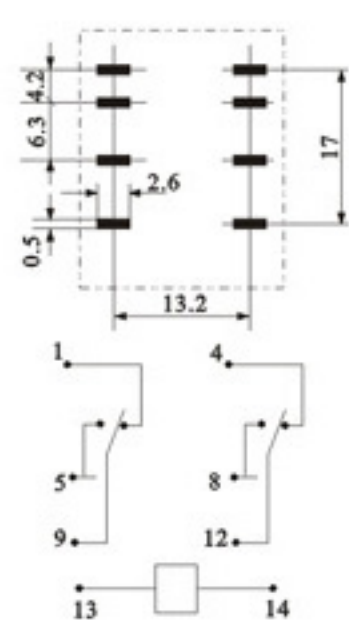


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		LY4,-S,-N,-F,-O
DIMENSIONS(mm)		27.5×41×35
CONTACT FORM		4Z
CONTACT CAPACITY		10A 250VAC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC: ≤ 0.9W AC: ≤ 1.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC: ≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		P.C.B&Socket  
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 70g
LIKE PRODUCTS		富士達公司 HH64P
FITTED SOCKET		PTF14A PTF14A-E PT14
REMARKS		With lamp:-N,FLANGE:-F, With button:-S,PCB:-O



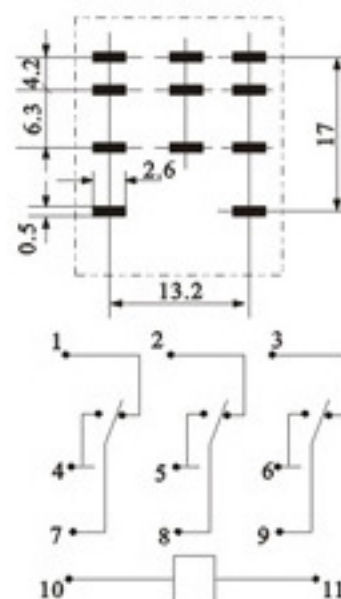


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		MY2,-S,-N-F,-O
DIMENSIONS(mm)		27.5×21.5×35
CONTACT FORM		2Z
CONTACT CAPACITY		5A 250V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC: ≤ 0.9W AC: ≤ 1.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC: ≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		P.C.B&Socket  
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 35g
LIKE PRODUCTS		美國P&B公司 L10KH2 富士通公司 HH52P 上無八廠 4104
FITTED SOCKET		PYF08A PYF08A-E PY08
REMARKS		With lamp:-N,FLANGE:-F, With button:-S,PCB:-O

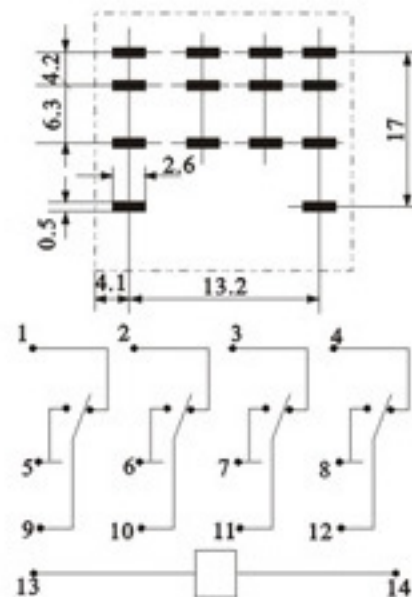


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		MY3,-S,-N-F,-O
DIMENSIONS(mm)		27.5×21.5×35
CONTACT FORM		3Z
CONTACT CAPACITY		5A 250V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC: ≤ 0.9W AC: ≤ 1.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC: ≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		P.C.B&Socket  
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 35g
LIKE PRODUCTS		美國P&B公司 L10KH2 富士通公司 HH52P 上無八廠 4104
FITTED SOCKET		PYF11A PYF11A-E PY11
REMARKS		With lamp:-N,FLANGE:-F, With button:-S,PCB:-O




CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES	
MODEL		MY4,-S,-N-F,-O	
DIMENSIONS(mm)		27.5×21.5×35	
CONTACT FORM		4Z	
CONTACT CAPACITY		5A 250V AC	
COIL VOLTAGE	DC	6~220V	
	AC	6~380V	
COIL POWER		DC: ≤ 0.9W AC: ≤ 1.2VA	
PICK-UP		DC: ≤ 75% AC: ≤ 80%	
DROP-OUT		DC: ≥ 10% AC: ≥ 30%	
CONTACT RESISTANCE		≤ 50mΩ	
INSULATION RESISTANCE		≥ 100MΩ	
LIFE	ELECTRICAL	10 ⁵ times	
	MECHANICAL	10 ⁷ times	
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms	
	BETWEEN COIL & CONTACTS	1500v rms	
MOUNTING FORM		P.C.B&Socket  	
OPERATING TEMPERATURE		-40℃~+55℃	
WEIGHT		About 35g	
LIKE PRODUCTS		美國P&B公司 L10KH2 富士通公司 HH52P 上無八廠 4104	
FITTED SOCKET		PYF14A PYF14A-E PY14	
REMARKS		With lamp:-N,FLANGE:-F, With button:-S,PCB:-O	




Model Q




Model T


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		MK2P-I,-S,-N
DIMENSIONS(mm)		34.5×34.5×52
CONTACT FORM		2Z
CONTACT CAPACITY		10A 250V AC, DC28V
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC: ≤ 1.5W AC: ≤ 2.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC: ≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		Socket 
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 85g
LIKE PRODUCTS		H,K FRM5
FITTED SOCKET		PF083A PF083A-E US-08
REMARKS		With lamp:-N With button:-S




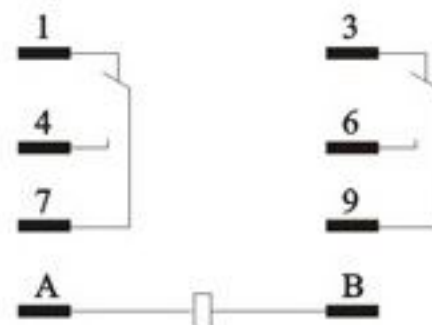
Model Q




Model T




CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES	
MODEL		MK3P-I,-S,-N	
DIMENSIONS(mm)		34.5×34.5×52	
CONTACT FORM		3Z	
CONTACT CAPACITY		10A 250V AC, DC28V	
COIL VOLTAGE	DC	6~220V	
	AC	6~380V	
COIL POWER		DC: ≤ 1.5W AC: ≤ 2.2VA	
PICK-UP		DC: ≤ 75% AC: ≤ 80%	
DROP-OUT		DC: ≥ 10% AC: ≥ 30%	
CONTACT RESISTANCE		≤ 50mΩ	
INSULATION RESISTANCE		≥ 100MΩ	
LIFE	ELECTRICAL	10 ⁵ times	
	MECHANICAL	10 ⁷ times	
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms	
	BETWEEN COIL & CONTACTS	1500v rms	
MOUNTING FORM		Socket	
OPERATING TEMPERATURE		-40℃~+55℃	
WEIGHT		About 85g	
LIKE PRODUCTS		H,K FRM5	
FITTED SOCKET		PF113A PF113A-E US-11	
REMARKS		With lamp:-N With button:-S	




CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		RP-2P
DIMENSIONS(mm)		36×30×52
CONTACT FORM		2Z
CONTACT CAPACITY		10A 220VAC
COIL VOLTAGE	DC	6V~220V
	AC	6V~380V
COIL POWER		DC:≤ 1.2W AC: ≤ 2.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC:≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	
MOUNTING FORM		Socket
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 85g
LIKE PRODUCTS		----
FITTED SOCKET		PPF-011

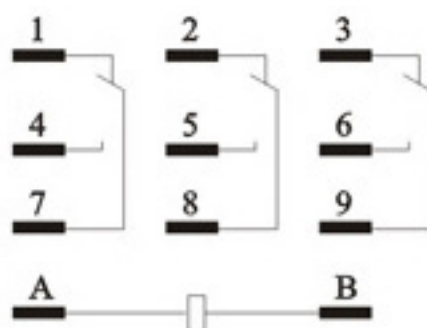

CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		RP-3P
DIMENSIONS(mm)		36×36×52
CONTACT FORM		3Z
CONTACT CAPACITY		10A 220VAC
COIL VOLTAGE	DC	6V~220V
	AC	6V~380V
COIL POWER		DC:≤ 1.2W AC: ≤ 2.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC:≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	
MOUNTING FORM		Socket
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 85g
LIKE PRODUCTS		----
FITTED SOCKET		PPF-011




Model Q




Model T

CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES	
MODEL		JQX-10F(JTX)	
DIMENSIONS(mm)		34.5×34.5×52	
CONTACT FORM		2Z	
CONTACT CAPACITY		10A 250VAC	
COIL VOLTAGE	DC	6V~220V	
	AC	6V~380V	
COIL POWER		DC:≤ 1.5W AC: ≤ 2.5VA	
PICK-UP		DC: ≤ 75% AC: ≤ 80%	
DROP-OUT		DC:≥ 10% AC: ≥ 30%	
CONTACT RESISTANCE		≤ 50mΩ	
INSULATION RESISTANCE		≥ 100MΩ	
LIFE	ELECTRICAL	10 ⁵ times	
	MECHANICAL	10 ⁷ times	
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms	
	BETWEEN COIL & CONTACTS		
MOUNTING FORM		Socket	
OPERATING TEMPERATURE		-40℃~+55℃	
WEIGHT		About 85g	
LIKE PRODUCTS		OMRON MK2P MK3PH,K FRM5	
FITTED SOCKET		PF083A PF083A-E PL08	




Model Q





Model T


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JQX-10F(JTX)
DIMENSIONS(mm)		34.5×34.5×52
CONTACT FORM		3Z
CONTACT CAPACITY		10A 250VAC
COIL VOLTAGE	DC	6V~220V
	AC	6V~380V
COIL POWER		DC:≤ 1.5W AC: ≤ 2.5VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC:≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	
MOUNTING FORM		Socket
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 85g
LIKE PRODUCTS		OMRON MK2P MK3PH,K FRM5
FITTED SOCKET		PF113A PF113A-E PL11

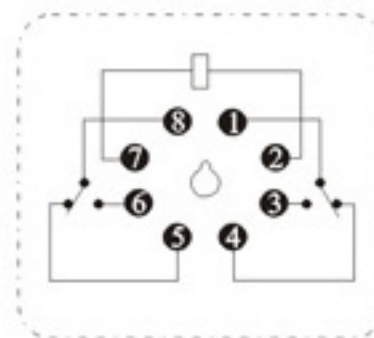



CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		AL12(60.12)
DIMENSIONS(mm)		43.5×43.5×52
CONTACT FORM		2Z
CONTACT CAPACITY		10A
COIL VOLTAGE	DC	12V~220V
	AC	12V~380V
COIL POWER		DC: ≤1.3W AC: ≤2.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC: ≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		Socket 插座式
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 85g
LIKE PRODUCTS		60.12
FITTED SOCKET		90.22

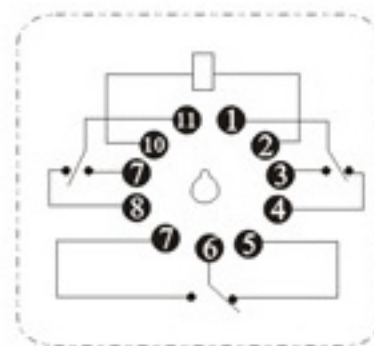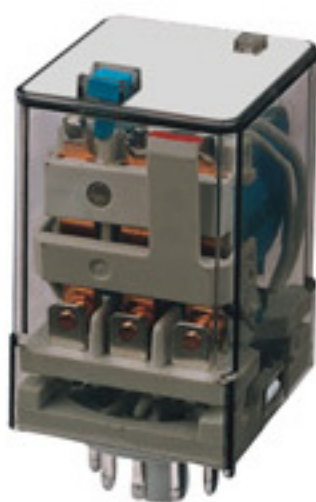



CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		AL13(60.13)
DIMENSIONS(mm)		43.5×43.5×52
CONTACT FORM		3Z
CONTACT CAPACITY		10A
COIL VOLTAGE	DC	12V~220V
	AC	12V~380V
COIL POWER		DC: ≤1.3W AC: ≤2.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC: ≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		Socket 插座式
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 85g
LIKE PRODUCTS		60.13
FITTED SOCKET		90.23

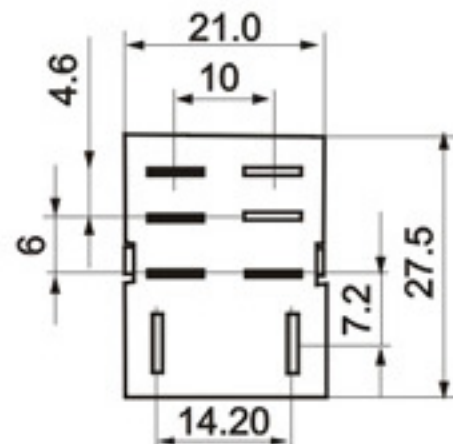


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		56.02
DIMENSIONS(mm)		27.5×21×36
CONTACT FORM		2Z
CONTACT CAPACITY		10A 220V AC
COIL VOLTAGE	DC	6V~220V
	AC	6V~380V
COIL POWER		DC: ≤0.9W AC: ≤1.5VA
PICK-UP		DC: ≤75% AC: ≤80%
DROP-OUT		DC: ≥10% AC: ≥30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		Socket
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 35g
LIKE PRODUCTS		HH62P LY2
FITTED SOCKET		PTF08A PTF08A-E PT08 PT08-0

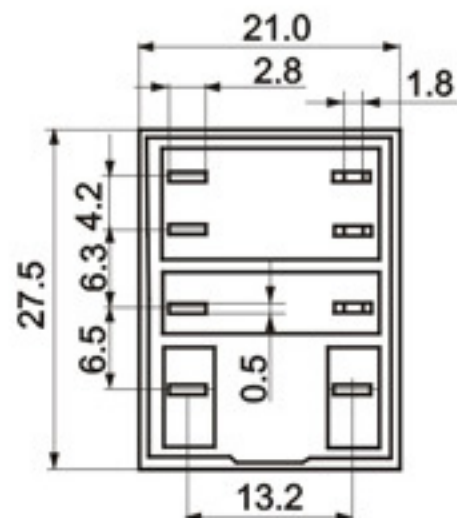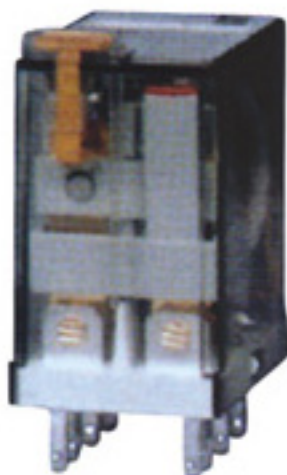

CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		55.02
DIMENSIONS(mm)		27.5×21×34
CONTACT FORM		2Z
CONTACT CAPACITY		5A 28V DC 5A 250V AC
COIL VOLTAGE	DC	6V~220V
	AC	6V~380V
COIL POWER		DC: ≤0.9W AC: ≤1.5VA
PICK-UP		DC: ≤75% AC: ≤80%
DROP-OUT		DC: ≥10% AC: ≥30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 500MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		Socket
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 35g
LIKE PRODUCTS		HH52P MY2
FITTED SOCKET		PTF08A PTF08A-E PT08 PT08-0

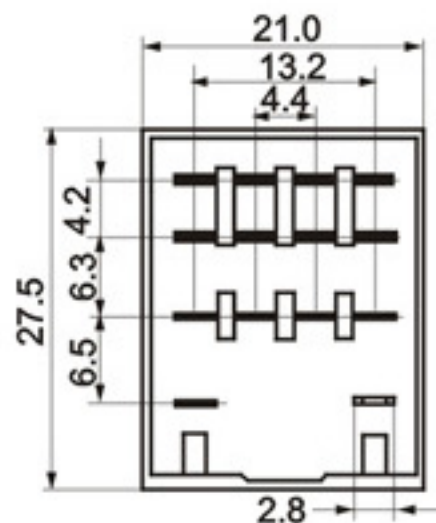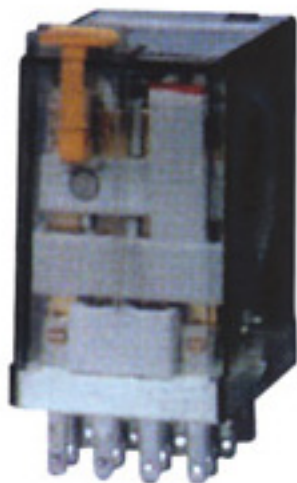



CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		55.04
DIMENSIONS(mm)		27.5×21×34
CONTACT FORM		4Z
CONTACT CAPACITY		5A 28V DC 5A 250V AC
COIL VOLTAGE	DC	6V~220V
	AC	6V~380V
COIL POWER		DC: ≤0.9W AC: ≤1.5VA
PICK-UP		DC: ≤75% AC: ≤80%
DROP-OUT		DC: ≥10% AC: ≥30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 500MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		Socket
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 35g
LIKE PRODUCTS		HH54P MY4
FITTED SOCKET		PTF14A PTF14A-E PT14 PT14-0

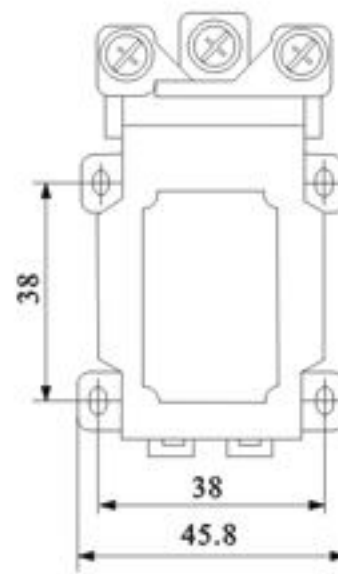



CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-60F
DIMENSIONS(mm)		45.8×46×67
CONTACT FORM		1Z
CONTACT CAPACITY		60A 250V AC 60A 24V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤ 2.0W AC:≤ 2.5VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC:≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 1000M Ω
LIFE	ELECTRICAL	10 ⁴ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 160g
LIKE PRODUCTS		----
FITTED SOCKET		----

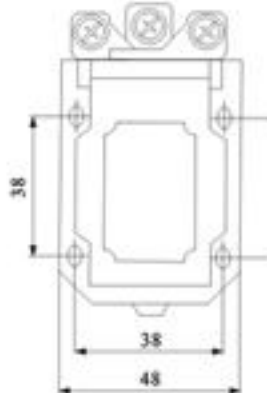


CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-58F
DIMENSIONS(mm)		48×49×68
CONTACT FORM		1Z
CONTACT CAPACITY		60A 250V AC 60A 24V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤ 2.0W AC:≤ 2.5VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC:≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 1000MΩ
LIFE	ELECTRICAL	10 ⁴ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 175g
MOUNTING HOLES		
LIKE PRODUCTS		----
FITTED SOCKET		----

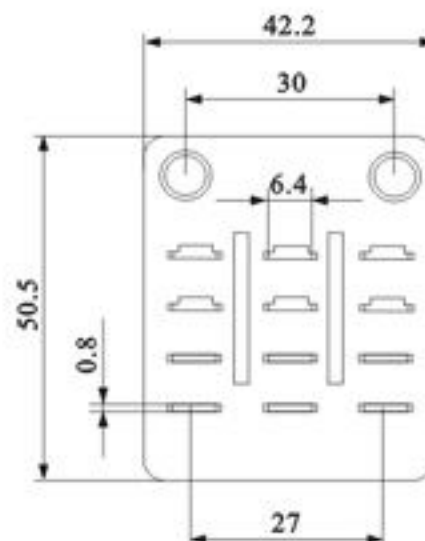


CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-38F
DIMENSIONS(mm)		50.5×42.2×55.3
CONTACT FORM		3Z
CONTACT CAPACITY		30/40A 120V AC 30/40A 250V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤2.0W AC:≤3.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC:≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 500MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 130g
LIKE PRODUCTS		----
FITTED SOCKET		----

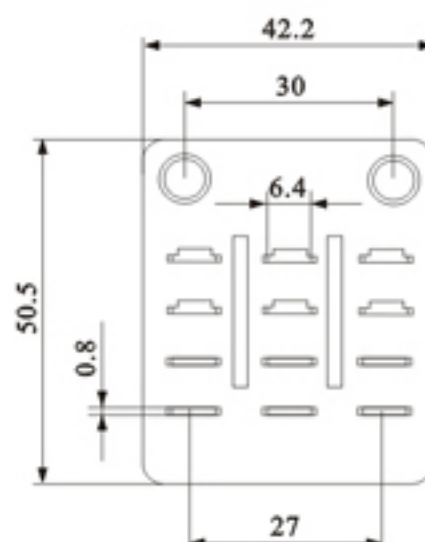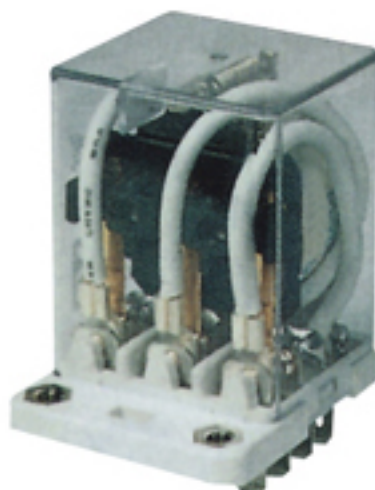


CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-38A
DIMENSIONS(mm)		50.5×42.2×55.3
CONTACT FORM		3Z
CONTACT CAPACITY		30/40A 120V AC 30/40A 250V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤2.0W AC:≤3.2VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC:≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 500M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 130g
LIKE PRODUCTS		----
FITTED SOCKET		----

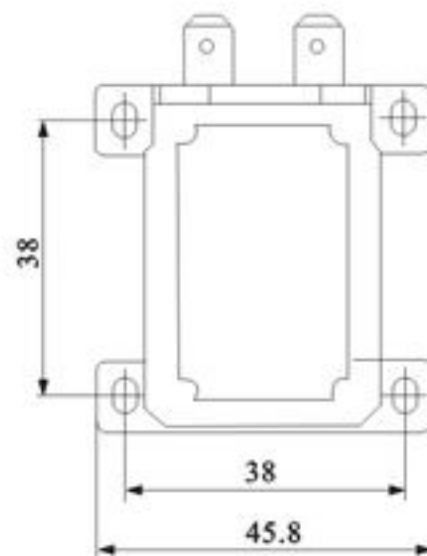


CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-12F(JL-6)
DIMENSIONS(mm)		45.8×38.5×48
CONTACT FORM		2Z
CONTACT CAPACITY		20A 250V AC 30A 250V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC: ≤ 2.5W AC: ≤ 4.0VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC: ≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 500M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 130g
LIKE PRODUCTS		----
FITTED SOCKET		----

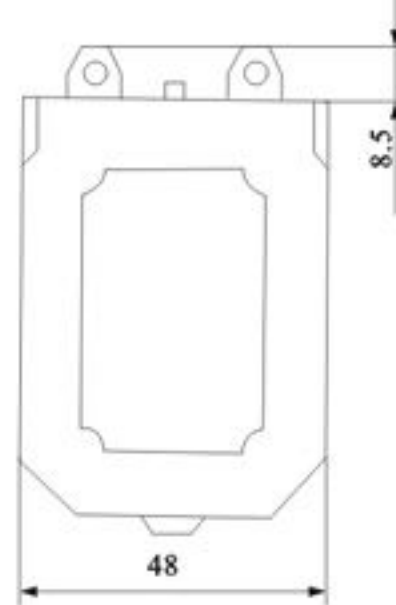


CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-40F 2Z
DIMENSIONS(mm)		45.8×45×64
CONTACT FORM		2Z
CONTACT CAPACITY		40A 250V AC 40A 24V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤ 2.0W AC:≤ 2.5VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC:≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 1000M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 150g
LIKE PRODUCTS		----
FITTED SOCKET		----

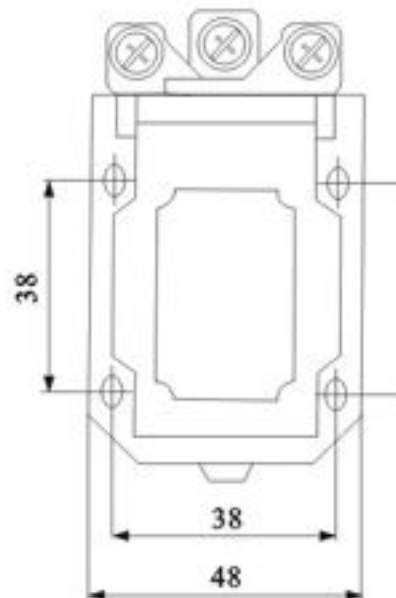



CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-52F
DIMENSIONS(mm)		49×48×68
CONTACT FORM		1Z
CONTACT CAPACITY		40A 250V AC 40A 24V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤ 2.0W AC:≤ 2.5VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC:≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 1000M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 170g
LIKE PRODUCTS		----
FITTED SOCKET		----

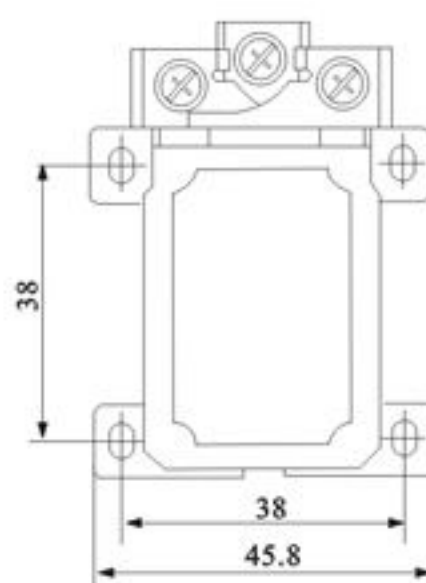


CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-50F
DIMENSIONS(mm)		45.8×38.5×48
CONTACT FORM		1Z
CONTACT CAPACITY		30A 250V AC 40A 250V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC: ≤ 2.5W AC: ≤ 4.0VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC: ≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 500M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 140g
LIKE PRODUCTS		----
FITTED SOCKET		----

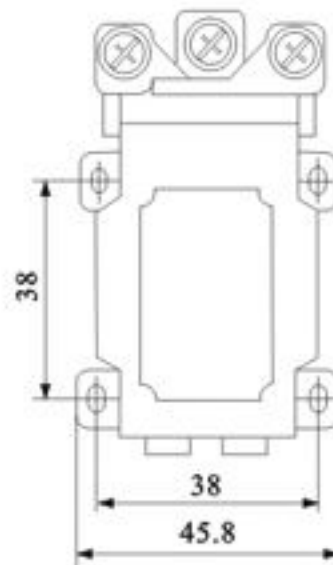


CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-40F
DIMENSIONS(mm)		45.8×45×64
CONTACT FORM		1Z
CONTACT CAPACITY		40A 250V AC 40A 24V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤ 2.0W AC:≤ 2.5VA
PICK-UP		DC: ≤ 75% AC: ≤ 80%
DROP-OUT		DC:≥ 10% AC: ≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 1000M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+60℃
WEIGHT		About 150g
LIKE PRODUCTS		----
FITTED SOCKET		----

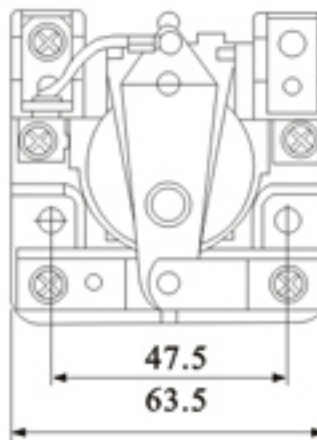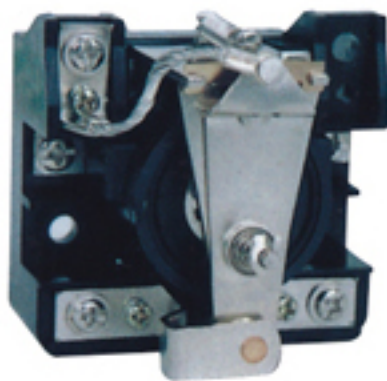


CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-62-1Z 80A
DIMENSIONS(mm)		63.5×61.7
CONTACT FORM		1Z
CONTACT CAPACITY		80A 250VAC 80A 30VDC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤ 2W AC:≤ 3.2VA
PICK-UP		DC:≤ 75% AC:≤ 80%
DROP-OUT		DC:≥ 10% AC:≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 100M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁶ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 210g
LIKE PRODUCTS		----
FITTED SOCKET		----

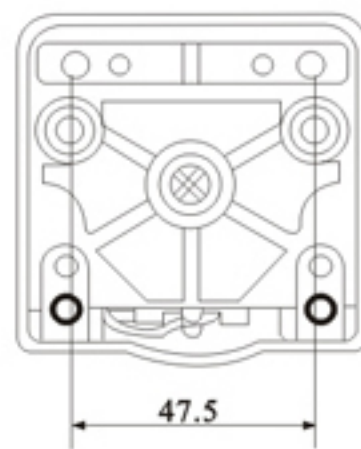



CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-62F1Z 80A
DIMENSIONS(mm)		68.2×62×69
CONTACT FORM		1Z
CONTACT CAPACITY		80A 250VAC 80A 30VDC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤ 2W AC:≤ 3.2VA
PICK-UP		DC:≤ 75% AC:≤ 80%
DROP-OUT		DC:≥ 10% AC:≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 100M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁶ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 220g
LIKE PRODUCTS		----
FITTED SOCKET		----

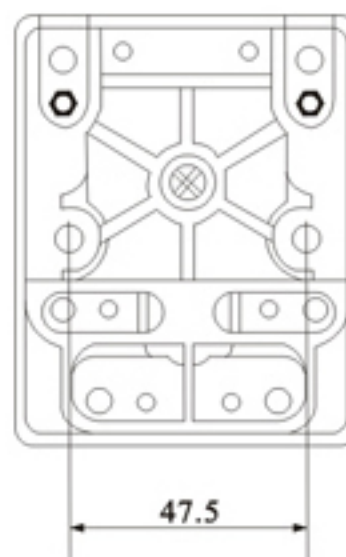


CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-62F1Z 120A
DIMENSIONS(mm)		68.2×62×84
CONTACT FORM		2Z
CONTACT CAPACITY		80A 250VAC 80A 30VDC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤ 2W AC:≤ 3.2VA
PICK-UP		DC:≤ 75% AC:≤ 80%
DROP-OUT		DC:≥ 10% AC:≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 100M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁶ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 340g
LIKE PRODUCTS		----
FITTED SOCKET		----

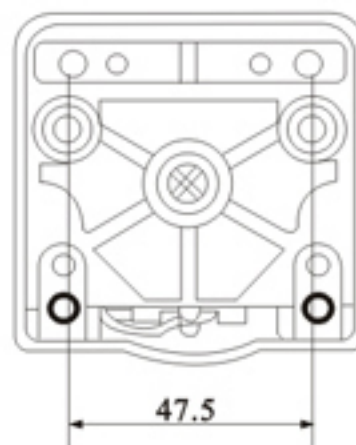


CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-62 2Z 80A
DIMENSIONS(mm)		68.2×62×69
CONTACT FORM		2Z
CONTACT CAPACITY		120A 250VAC 120A 30VDC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤ 2W AC:≤ 3.2VA
PICK-UP		DC:≤ 75% AC:≤ 80%
DROP-OUT		DC:≥ 10% AC:≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 100M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁶ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		Welding
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 223g
LIKE PRODUCTS		----
FITTED SOCKET		----

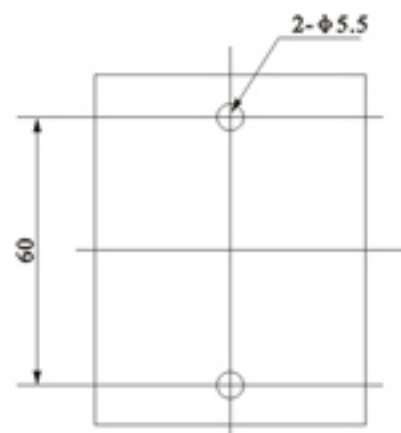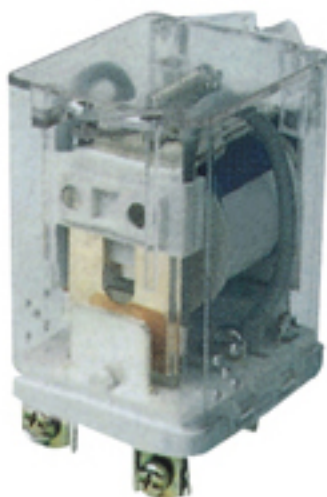



CLASSIFICATION		POWER RELAY SERIES
MODEL		JQX-59F
DIMENSIONS(mm)		78×46×52
CONTACT FORM		1Z 1H 1D
CONTACT CAPACITY		80A 250V AC
COIL VOLTAGE	DC	6~220V
	AC	6~380V
COIL POWER		DC:≤ 2W AC:≤ 3.2VA
PICK-UP		DC:≤ 75% AC:≤ 80%
DROP-OUT		DC:≥ 10% AC:≥ 30%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 1000M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁶ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		Socket
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 125g
LIKE PRODUCTS		----
FITTED SOCKET		----

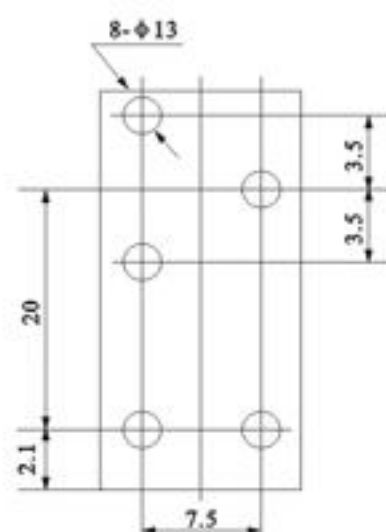


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JQX-14F-1□
DIMENSIONS(mm)		28.9×12.8×24.5
CONTACT FORM		1Z 1H 1D
CONTACT CAPACITY		10A 220V AC 30V DC
COIL VOLTAGE	DC	3~110V
	AC	6~220V
COIL POWER		≤ 0.55VA
PICK-UP		≤ 75%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 1000MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1000v rms
MOUNTING FORM		P.C.B
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 18g
LIKE PRODUCTS		Omron:G2R 富士: FBR610
FITTED SOCKET		----

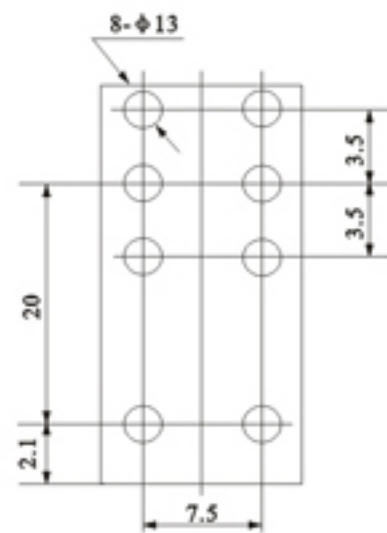


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JQX-14F-2□
DIMENSIONS(mm)		28.9×12.8×24.5
CONTACT FORM		2Z 2H 2D
CONTACT CAPACITY		5A 220V AC 30V DC
COIL VOLTAGE	DC	3~110V
	AC	6~220V
COIL POWER		≤ 0.55VA
PICK-UP		≤ 75%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 1000MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1000v rms
MOUNTING FORM		P.C.B
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 18g
LIKE PRODUCTS		Omron:G2R 富士: FBR610
FITTED SOCKET		----

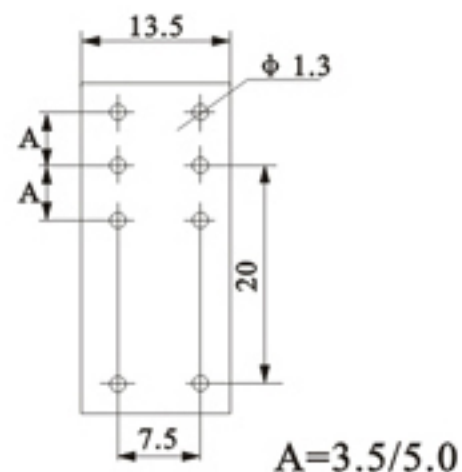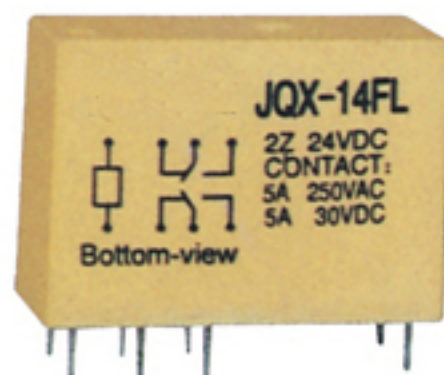



CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JQX-145F(JQX-14FL)
DIMENSIONS(mm)		30×13.50×21
CONTACT FORM		1Z 2Z
CONTACT CAPACITY		1Z 16A 250V AC 2Z 5A 250VAC
COIL VOLTAGE	DC	3~110V
	AC	6~220V
COIL POWER		≤ 0.55VA
PICK-UP		≤ 75%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 1000MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1000v rms
MOUNTING FORM		P.C.B
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 15g
LIKE PRODUCTS		Omron:G2R 富士: FBR610
FITTED SOCKET		----

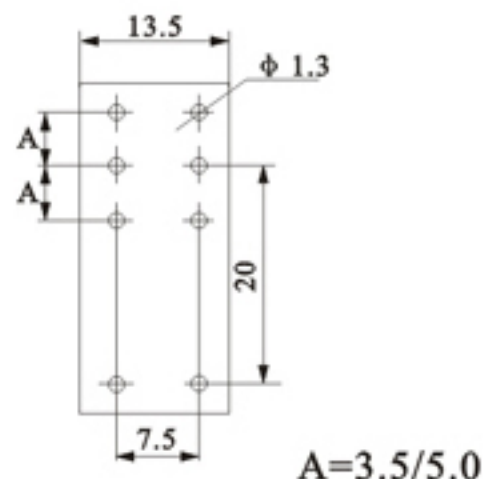


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JQX-146F(JQX-14FF)
DIMENSIONS(mm)		30×13.5×27
CONTACT FORM		1Z 2Z
CONTACT CAPACITY		1Z 16A 250V AC 2Z 5A 250VAC
COIL VOLTAGE	DC	3~110V
	AC	6~220V
COIL POWER		≤ 0.55VA
PICK-UP		≤75%
DROP-OUT		≥10%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 1000M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1000v rms
MOUNTING FORM		P.C.B
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 19g
LIKE PRODUCTS		Omron:G2R 富士: FBR610
FITTED SOCKET		----

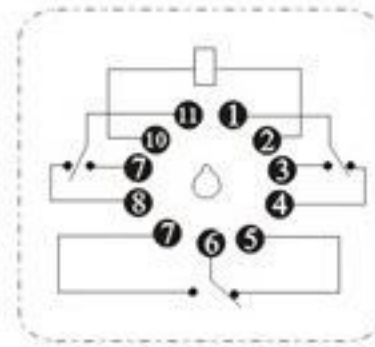



CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JD1912F
DIMENSIONS(mm)		28×30.5×25
CONTACT FORM		1Z 1H
CONTACT CAPACITY		10A 20A 30A
COIL VOLTAGE	DC	12V 24V
	AC	--
COIL POWER		≤ 1.6W
PICK-UP		≤ 70%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 30mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	5×10 ⁵ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	500V 50Hz
	BETWEEN COIL & CONTACTS	
MOUNTING FORM		Screw mounting & Socket
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 38g
LIKE PRODUCTS		Jqx-2 德國4RA
FITTED SOCKET		CS-3770

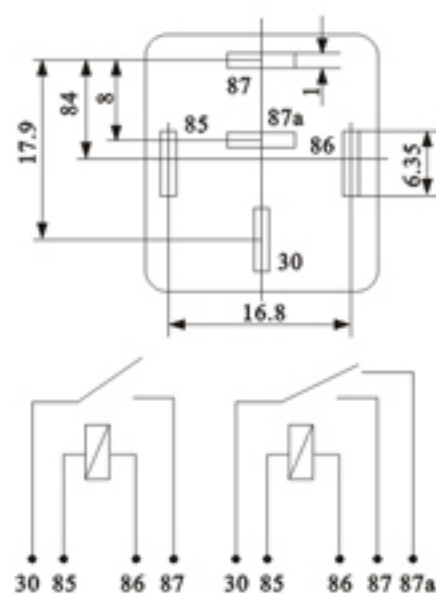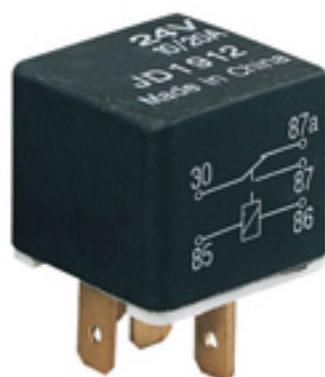

CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JD1912
DIMENSIONS(mm)		27×27×25
CONTACT FORM		1Z 1H
CONTACT CAPACITY		10A 20A 30A
COIL VOLTAGE	DC	12V 24V
	AC	--
COIL POWER		≤ 1.6W
PICK-UP		≤ 70%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 30mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	5×10 ⁵ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	500V 50Hz
	BETWEEN COIL & CONTACTS	
MOUNTING FORM		Screw mounting & Socket
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 28g
LIKE PRODUCTS		Jqx-2 德國4RA
FITTED SOCKET		CS-3770

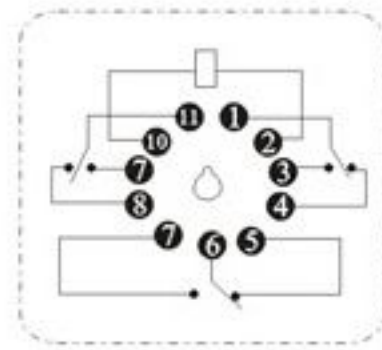


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		AVF4-3
DIMENSIONS(mm)		29×29×26.5
CONTACT FORM		1H 1Z 1U
CONTACT CAPACITY		25A 80A
COIL VOLTAGE	DC	6V 12V 24V
	AC	--
COIL POWER		≤ 1.6W
PICK-UP		≤ 70%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 30mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	5×10 ⁵ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	500V 50Hz
	BETWEEN COIL & CONTACTS	
MOUNTING FORM		Screw mounting & Socket
OPERATING TEMPERATURE		-40℃~+85℃
WEIGHT		About 46g
LIKE PRODUCTS		SIEMENS Vf7
FITTED SOCKET		CS-3770




1A



1B




1C




1U


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		AVF4-4
DIMENSIONS(mm)		29×29×26.5(+16)
CONTACT FORM		1H 1Z 1U
CONTACT CAPACITY		25A 80A
COIL VOLTAGE	DC	6V 12V 24V
	AC	--
COIL POWER		≤ 1.6W
PICK-UP		≤ 70%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 30mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	5×10 ⁵ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	500V 50Hz
	BETWEEN COIL & CONTACTS	
MOUNTING FORM		Screw mounting & Socket
OPERATING TEMPERATURE		-40℃~+85℃
WEIGHT		About 48g
LIKE PRODUCTS		SIEMENS Vf7
FITTED SOCKET		CS-3770

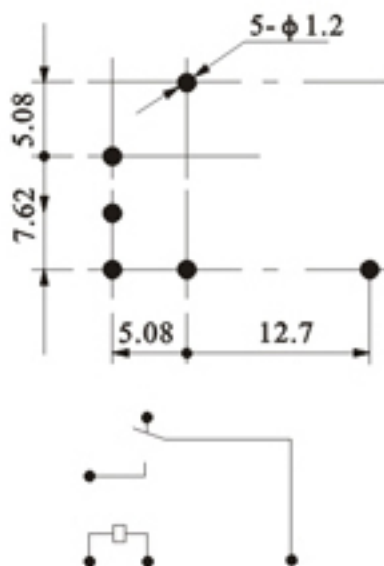


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		T72(4459) T72-2
DIMENSIONS(mm)		22.3×17.3×15 21.4×16.5×15(NT72-2)
CONTACT FORM		1H 1Z 1D
CONTACT CAPACITY		12A
COIL VOLTAGE	DC	6V 12V 24V
	AC	--
COIL POWER		≤ 0.45W
PICK-UP		≤ 70%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 30mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	5×10 ⁵ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000V 50Hz
	BETWEEN COIL & CONTACTS	2500V 50Hz 4000V(T72-2)
MOUNTING FORM		PCB
OPERATING TEMPERATURE		-40℃~+85℃
WEIGHT		About 48g
LIKE PRODUCTS		SIEMENS V23148 TAKAMISAWA LZ
FITTED SOCKET		----

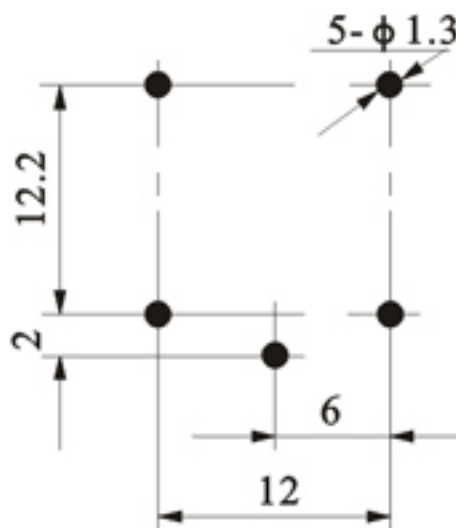


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JZC-22F
DIMENSIONS(mm)		20.3×16.8×20.2
CONTACT FORM		1H 1Z 1D
CONTACT CAPACITY		15A
COIL VOLTAGE	DC	6V 12V 24V
	AC	--
COIL POWER		≤ 0.45W
PICK-UP		≤ 70%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 30mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	5×10 ⁵ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	750V 50Hz
	BETWEEN COIL & CONTACTS	1500V 50Hz
MOUNTING FORM		PCB
OPERATING TEMPERATURE		-40℃~+85℃
WEIGHT		About 48g
LIKE PRODUCTS		ORIGINAL SRU
FITTED SOCKET		----

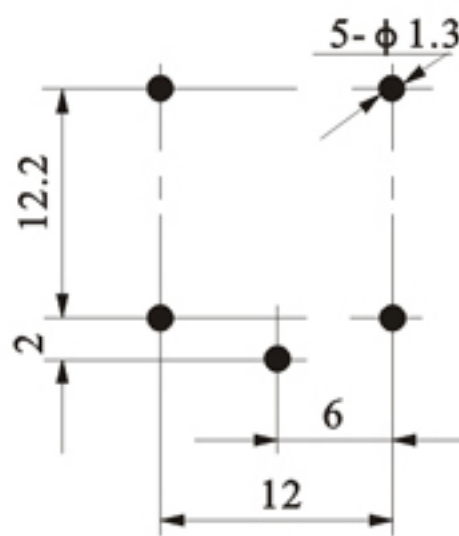


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JZC-22F ₂
DIMENSIONS(mm)		22.5×16.8×20.2
CONTACT FORM		1H 1Z 1D
CONTACT CAPACITY		20A
COIL VOLTAGE	DC	6V 12V 24V
	AC	--
COIL POWER		≤ 0.45W
PICK-UP		≤ 70%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 30mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	5×10 ⁵ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	750V 50Hz
	BETWEEN COIL & CONTACTS	2500V 50Hz
MOUNTING FORM		PCB
OPERATING TEMPERATURE		-40℃~+85℃
WEIGHT		About 48g
LIKE PRODUCTS		ORIGINAL SRU
FITTED SOCKET		----

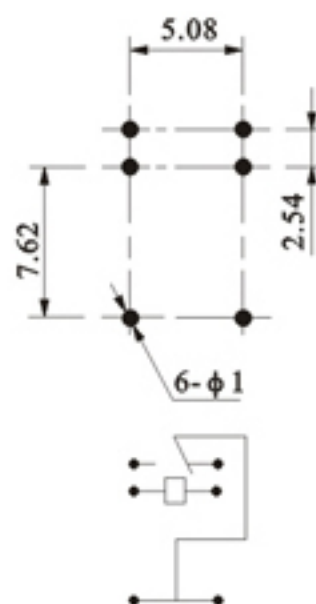


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JRC-23F
DIMENSIONS(mm)		12.5×7.5×10
CONTACT FORM		1Z
CONTACT CAPACITY		1A
COIL VOLTAGE	DC	1~24V
	AC	--
COIL POWER		≤ 0.2W
PICK-UP		≤ 70%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 100mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	5×10 ⁵ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	400V 50Hz
	BETWEEN COIL & CONTACTS	1000V 50Hz
MOUNTING FORM		PCB
OPERATING TEMPERATURE		-40℃~+85℃
WEIGHT		About 2.2g
LIKE PRODUCTS		OMRON G5V-1 SIEMENS V23111
FITTED SOCKET		----

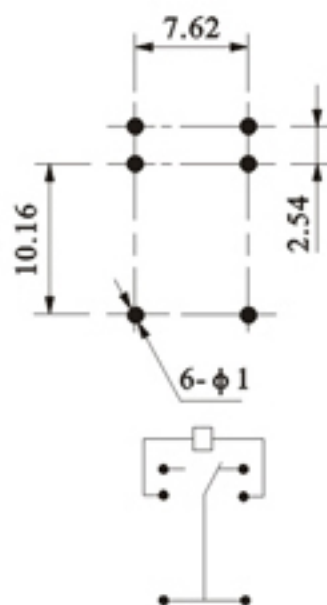


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		AN4100(4100F)
DIMENSIONS(mm)		15.5×11×11.5
CONTACT FORM		1H 1Z 1D
CONTACT CAPACITY		5A
COIL VOLTAGE	DC	3~24V
	AC	--
COIL POWER		≤ 0.45W
PICK-UP		≤ 70%
DROP-OUT		≥ 10%
CONTACT RESISTANCE		≤ 100mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	5×10 ⁵ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	500V 50Hz
	BETWEEN COIL & CONTACTS	500V 50Hz
MOUNTING FORM		PCB
OPERATING TEMPERATURE		-40℃~+85℃
WEIGHT		About 3.5g
LIKE PRODUCTS		OMRON G2E
FITTED SOCKET		----

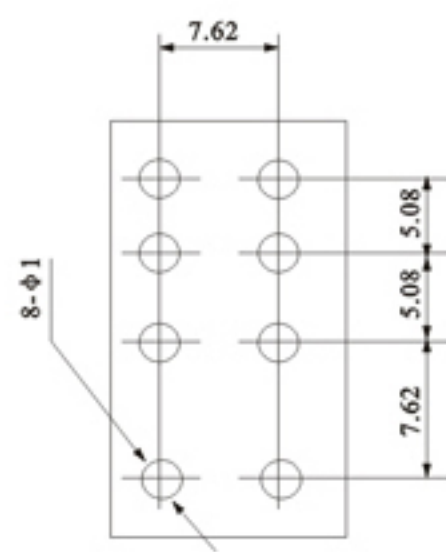

CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JRC-19F
DIMENSIONS(mm)		21×10×12
CONTACT FORM		2Z
CONTACT CAPACITY		1A 24V AC
COIL VOLTAGE	DC	3~24V
	AC	---
COIL POWER		≤ 0.36W
PICK-UP		≤75%
DROP-OUT		≥10%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 100M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1000v rms
MOUNTING FORM		P.C.B
OPERATING TEMPERATURE		-25℃~+55℃
WEIGHT		About 5g
LIKE PRODUCTS		4078
FITTED SOCKET		----

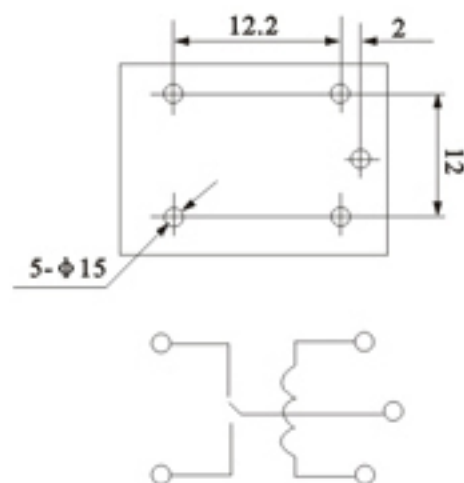

CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JQX-3F(T73)
DIMENSIONS(mm)		19.2×15.5×15
CONTACT FORM		1Z
CONTACT CAPACITY		5A,7A,12A,15A 1 50VAC 24VDC
COIL VOLTAGE	DC	3~24V
	AC	---
COIL POWER		≤ 0.45W
PICK-UP		≤75%
DROP-OUT		≥10%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 100M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1000v rms
MOUNTING FORM		P.C.B
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 12g
LIKE PRODUCTS		JQC-3F
FITTED SOCKET		----

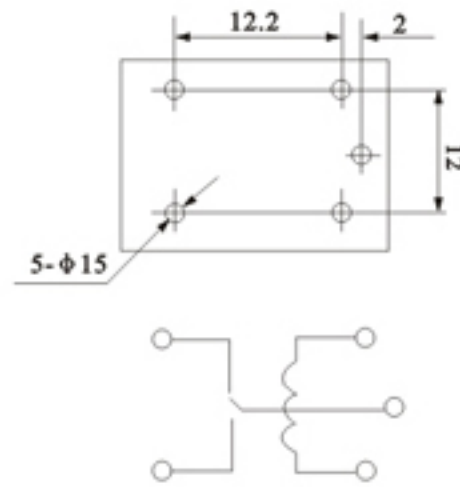


CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		4123
DIMENSIONS(mm)		22.5×16.5×16.5
CONTACT FORM		1Z
CONTACT CAPACITY		5A,7A,12A,15A 1 50VAC 24VDC
COIL VOLTAGE	DC	3~24V
	AC	---
COIL POWER		≤ 0.36W
PICK-UP		≤75%
DROP-OUT		≥10%
CONTACT RESISTANCE		≤ 50mΩ
INSULATION RESISTANCE		≥ 100MΩ
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1000v rms
	BETWEEN COIL & CONTACTS	1000v rms
MOUNTING FORM		P.C.B
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 12g
LIKE PRODUCTS		JQC-23F
FITTED SOCKET		----




CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JQX-16F(T90)
DIMENSIONS(mm)		32×27×20.4
CONTACT FORM		1Z 1H 1D
CONTACT CAPACITY		10A
COIL VOLTAGE	DC	5~48V
	AC	---
COIL POWER		≤ 0.9W
PICK-UP		≤75%
DROP-OUT		≥10%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 100M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	1500v rms
MOUNTING FORM		P.C.B
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 25g
MOUNTING HOLES		
LIKE PRODUCTS		美國P&B 公司 T90 T90 CHINA 4115
FITTED SOCKET		----

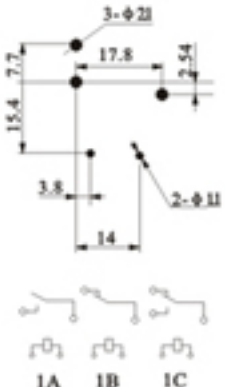

CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JQX-30F(T91)
DIMENSIONS(mm)		32.5×27.5×28
CONTACT FORM		1A 1B
CONTACT CAPACITY		40A,30A, 220V AC 30VDC
COIL VOLTAGE	DC	3~110V
	AC	12~220V
COIL POWER		≤ 0.9W
PICK-UP		≤75%
DROP-OUT		≥10%
CONTACT RESISTANCE		≤ 30m Ω
INSULATION RESISTANCE		≥ 1000M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		P.C.B & Direct ouplingt
OPERATING TEMPERATURE		-55℃~+100℃
WEIGHT		About 33g
MOUNTING HOLES		
LIKE PRODUCTS		SIEMENS T91 OMRON G7G
FITTED SOCKET		----

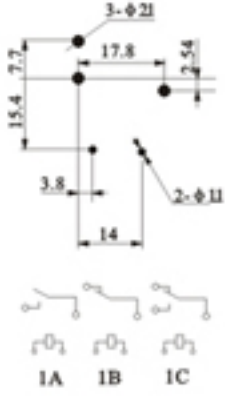

CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		T90T
DIMENSIONS(mm)		32.4×27.5×20
CONTACT FORM		1C
CONTACT CAPACITY		40A,30A, 220V AC 30VDC
COIL VOLTAGE	DC	3~110V
	AC	12~220V
COIL POWER		≤ 0.9W
PICK-UP		≤75%
DROP-OUT		≥10%
CONTACT RESISTANCE		≤ 30m Ω
INSULATION RESISTANCE		≥ 1000M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		P.C.B & Direct ouplingt
OPERATING TEMPERATURE		-55℃~+100℃
WEIGHT		About 35g
MOUNTING HOLES		
LIKE PRODUCTS		SIEMENS T91 OMRON G7G
FITTED SOCKET		----



CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		JQX-30FA
DIMENSIONS(mm)		50.2×27×28
CONTACT FORM		1A 1B 1C
CONTACT CAPACITY		40A,30A, 220V AC 30VDC
COIL VOLTAGE	DC	3~110V
	AC	12~220V
COIL POWER		≤ 0.9W
PICK-UP		≤75%
DROP-OUT		≥10%
CONTACT RESISTANCE		≤ 30m Ω
INSULATION RESISTANCE		≥ 1000M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	2500v rms
MOUNTING FORM		P.C.B & Direct ouplingt
OPERATING TEMPERATURE		-55℃~+100℃
WEIGHT		About 36g
MOUNTING HOLES		
LIKE PRODUCTS		SIEMENS T91 OMRON G7G
FITTED SOCKET		----



CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		G7L-1A
DIMENSIONS(mm)		68.5×33.5×47
CONTACT FORM		1H
CONTACT CAPACITY		25A 220VAC
COIL VOLTAGE	DC	6V~110V
	AC	6V~220V
COIL POWER		DC:≤ 1.9W AC:1.7-2.5VA
PICK-UP		≤ 75%
DROP-OUT		≥ 15%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 100M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	
MOUNTING FORM		welding
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 100g
MOUNTING HOLES		
LIKE PRODUCTS		----
FITTED SOCKET		----



CLASSIFICATION		MINI ELECTROMAGNETIC RELAY SERIES
MODEL		G7L-2P
DIMENSIONS(mm)		68.5×33.5×47
CONTACT FORM		2H
CONTACT CAPACITY		25A 220VAC
COIL VOLTAGE	DC	6V~110V
	AC	6V~220V
COIL POWER		DC:≤ 1.9W AC:1.7-2.5VA
PICK-UP		≤ 75%
DROP-OUT		≥ 15%
CONTACT RESISTANCE		≤ 50m Ω
INSULATION RESISTANCE		≥ 100M Ω
LIFE	ELECTRICAL	10 ⁵ times
	MECHANICAL	10 ⁷ times
DIELECTRIC STRENGTH	BETWEEN OPEN CONTACTS	1500v rms
	BETWEEN COIL & CONTACTS	
MOUNTING FORM		welding
OPERATING TEMPERATURE		-40℃~+55℃
WEIGHT		About 100g
MOUNTING HOLES		
LIKE PRODUCTS		----
FITTED SOCKET		----